

FUSION 100



IP66

PART NUMBER: FN-0116

KEY FEATURES:

- 180° or 40° light spread optic available
- Single color: 11 flash patterns
- Dual color: 40 flash patterns
- Available Colors: R, B, A, W, G, RW, BW, AW, AR, AB, RB
- 2 programmable modes
- Bracket options: Rotating, Headliner, Single L-Bracket, Double L-Bracket, End-Cap Mount
- Encased in rugged, aluminum extrusion

QUICK FACTS:


- Made in the USA
- Certifications: SAE J595, CT13, SAE J1119
- Available in single color or dual color
- Syncs with:
 - Fusion Surface Mount
 - Fusion 200
 - Fusion Mirror & Spoiler Mount
 - Fusion 1X and 2X
 - Cannon
 - T3
 - Wide-Lux

SPECIFICATIONS:

Dimensions	1.22" H x 4.8" L x 2.25" W
Warranty	5 years
Cable Harness Length	10 feet

Voltage	12VDC
Current Draw	1.5A (fuse @125%)
Single Color	6 high power 4 Watt Cree LED's
Dual Color	12 high power 4 Watt Cree LED's

WIRING DIAGRAM:

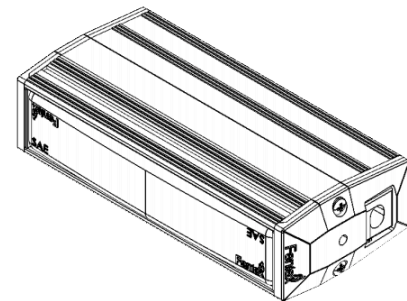

Wire Color:	Function:
■ Black	12V (-)
■ Red	12V (+) Mode 1
□ White 12V+	Mode 2
■ Green 12V-	Pattern/Sync