

# Omega XP Monitor 4" flange x 2.5" NH outlet, monitor only

## STYLE 3528

The Omega XP brass monitor offers maximum travel for optimal coverage in a compact, economical package for industrial and marine environments.

### Features

Omega XP Monitor

- Brass construction for corrosion resistance
- Cast-in turning vanes for more efficient flow
- Unique locking mechanism to hold desired position
- Enhanced design provides less tip weight which translates to lower handle operating force
- 360° of horizontal movement and 135° of vertical movement
- Elevation 90° above to 45° below horizontal
- Maximum operating pressure of 200 psi
- Maximum flow 1250 gpm




### Specifications

Style	3528
Certification(s)	
Weight	55 lbs (24.9 kg)
Type	Industrial
Material	Brass
Brand	Omega
Width	9 3/4" (248 mm)
Height	14" (356 mm)
Depth	9 3/4" (248 mm)
Inlet	3" or 4" FL (75 or 100 mm)
Outlet	2.5" NH (65 mm)
Flow (GPM)	1250
Flow (LPM)	4800



# Omega XP Monitor 4" flange x 2.5" NH outlet, monitor only

STYLE 3528

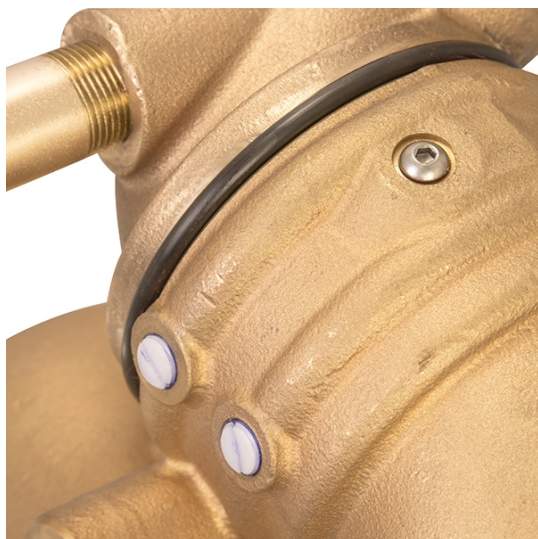

Shown with 4470 nozzle



# Omega XP Monitor 4" flange x 2.5" NH outlet, monitor only

**STYLE 3528**

## **Omega XP Monitor Specifications**

The 1250gpm rated monitor shall have a 3" flange waterway with a 2.5" NH discharge outlet and be of brass construction. The vertical and horizontal travel locks shall incorporate an off center brake handle and full contact brake band within the swivel joint. All elbows shall have cast-in turning vanes. The monitor shall have a vertical travel of 135° and horizontal travel of 360°.