




- Polyurethane saddle designed to suspend hoses.

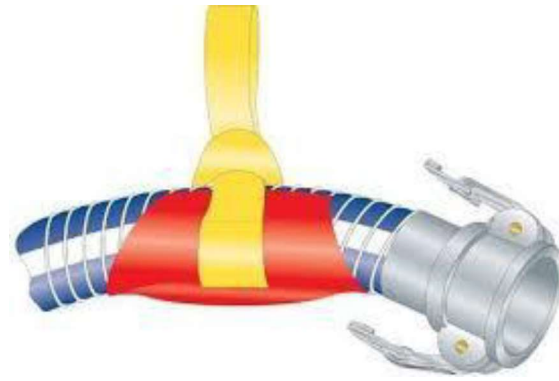

- Complete with UV treated polyester sling
- Designed to accommodate minimum bend radius
- Protect hose kinking and prolongs hose life
- Stock sizes : 3" and 4"

Size	3"		4"	
Material:	URETHANE		URETHANE	
Length:	12.75" / 32.4 cm		11.5" / 21.22 cm	
Shipping Weight:	4.25 lbs / 1.93 kgs		5 lbs / 2.27 kgs	
Shipping Dimensions:	13 x 6 x 5" / 32 x 15 x 12.5 cm		13 x 8 x 7" / 32 x 20 x 18 cm	
Sling Model:	Metal "D-Ring" Sling		Metal "D-Ring" Sling	
Sling Type:	RS 234D		RS 234D	
*Sling height:	8" / 20 cm		8" / 20 cm	
Sling Material:	UV Resistant Treated Polyester		UV Resistant Treated Polyester	
Rated Capacity:	2000 lbs/907 kgs @ 5:1 WLL	648 kgs/1428 lbs @ 7:1 WLL	2000 lbs/907 kgs @ 5:1 WLL	648 kgs/1428 lbs @ 7:1 WLL
Maximum Temperature:	200° F / 93.3° C		200° F / 93.3° C	