

# Industrial Air Cart

Provides air for up to four air-line respirators



The Industrial Air Cart permits up to 4 NIOSH approved air-line respirators to be connected to 2 one-hour 4,500 psig breathing apparatus cylinders (not included).



## Features

- Two-wheel poly powder-coated cart, two sets of double-cylinder straps, air-line hose rack and adjustable pull handle.
- A 5,500 psig pressure regulator reduces the 4,500 psig cylinder air to the proper air-line respirator inlet pressure.
- Low-pressure cylinder alarm whistle.
- An outlet pressure gauge operates in 0-125 psig range.
- Four-outlet manifold is available with 4 outlet fitting options.



Online interactive training with testing for the Industrial Air Cart, as well as other MSA products and applications, can be found at <http://msau.msanet.com>.


*Because every life has a **purpose...***

## Cart Weight and Dimensions

<b>Size</b>	35"H x 21"W x 15.25"D
<b>Unit Weight</b>	38.5 lbs. without cylinders

## Industrial Cart Components

- 1 Pull pin for handle
- 2 Pull pin for hose bracket
- 3 Nylon cylinder strap
- 4 Outlet connections
- 5 Regulator outlet pressure gauge
- 6 Pressure regulator
- 7 Cylinder manifold pressure gauge
- 8 Low-pressure alarm whistle
- 9 125 psig relief valve
- 10 CGA 347 nut, hand-tightening

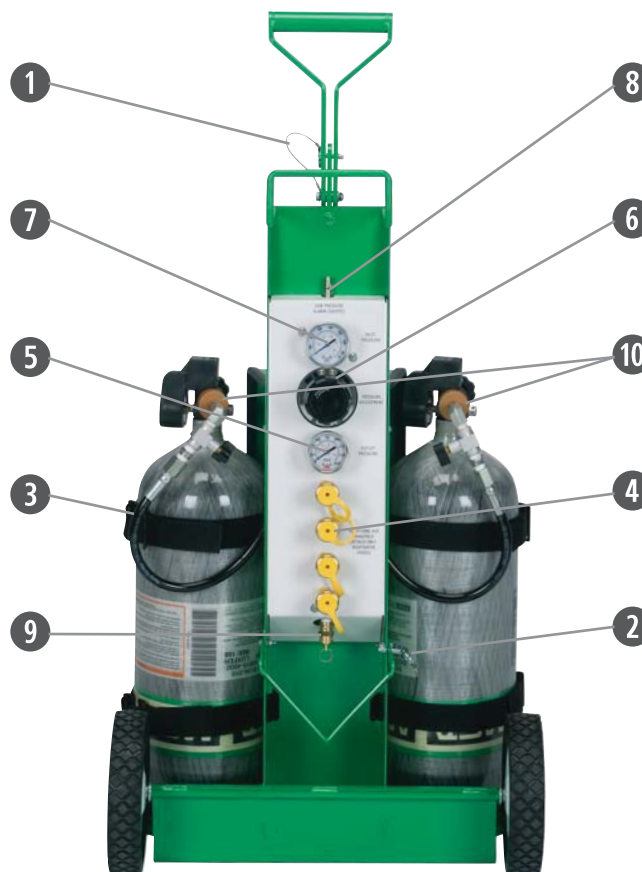

## Ordering Information

P/N	Description
10107537	Industrial Air Cart equipped with union adapters
10107779	Industrial Air Cart equipped with Snap-Tite Aluminum Quick Disconnects
10107780	Industrial Air Cart equipped with Foster Steel Quick Disconnects
10107811	Industrial Air Cart equipped with Hansen Brass Quick Disconnects

## Cylinders

The Industrial Air Cart is sold without air cylinders. The MSA cylinders below can be used with the cart. A 60-minute cylinder will provide maximum air supply.

P/N	Description
10127946-SP	60-minute, H-60SL, carbon-wrapped cylinder
10127945-SP	45-minute, H-45SL, carbon-wrapped cylinder
10127944-SP	30-minute, H-30SL, carbon-wrapped cylinder

Note: This Bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.



ID 0114-28-MC / July 2014  
© MSA 2014 Printed in U.S.A.

**MSA Corporate Center**  
1000 Cranberry Woods Drive  
Cranberry Township, PA 16066 USA  
Phone 724-776-8600  
[www.MSAsafety.com](http://www.MSAsafety.com)

**U.S. Customer Service Center**  
Phone 1-800-MSA-2222  
Fax 1-800-967-0398

**MSA Canada**  
Phone 1-800-672-2222  
Fax 1-800-967-0398

**MSA Mexico**  
Phone 01 800 672 7222  
Fax 52 - 44 2227 3943

**MSA International**  
Phone 724-776-8626  
Toll Free 1-800-672-7777  
Fax 724-741-1559  
Email [msa.international@msasafety.com](mailto:msa.international@msasafety.com)

**Offices and representatives worldwide**  
For further information: