


TODO-MATIC Hose units - coupling Ø 119

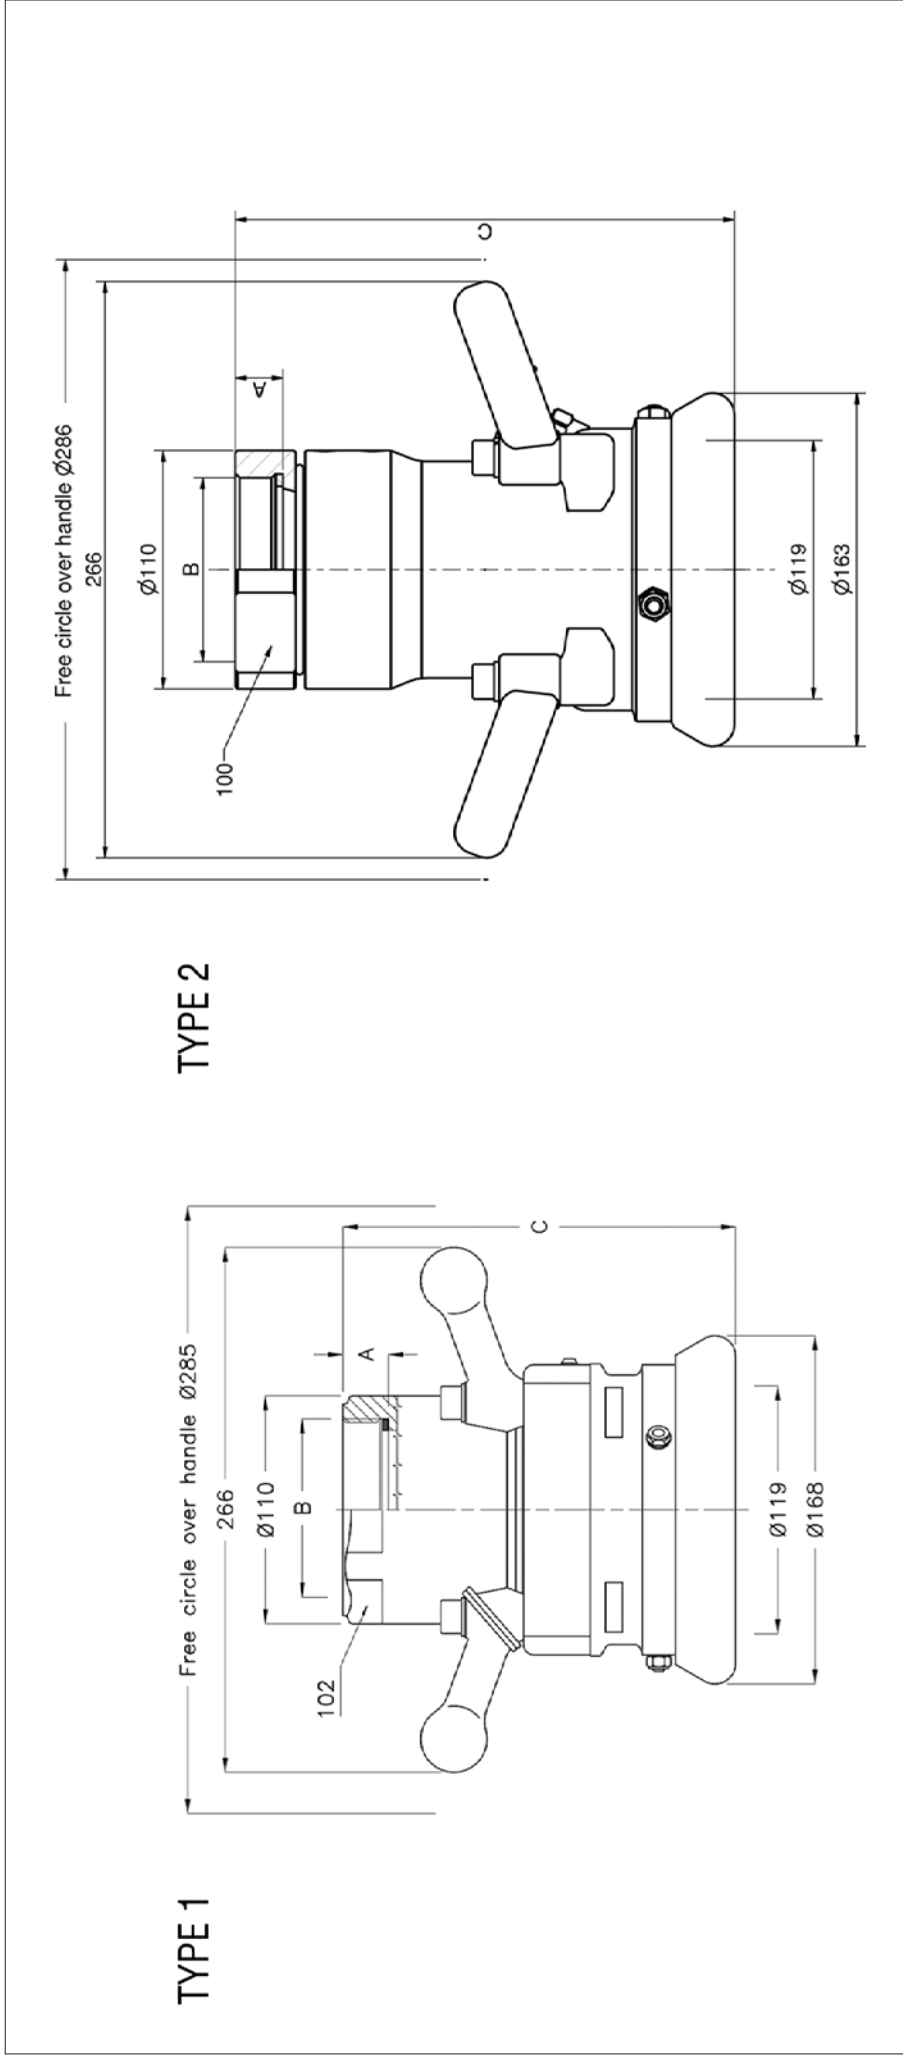

Max coupling pressure: 7 bar / 102 psi.  
\*\* Sealing material, see page 4.

\* NPT thread is a tapered pipe thread, tightening on the tread. Therefore there is no flat seal.

DN / Size	B (connection)	Material	Code No.	Weight	WP Bar/Psi	TP Bar/Psi	TYPE	A	C	D	E	F	G	H
80 / Ø119	3" BSP (ISO 228-G 3)	Aluminium	5532F-13**	4,9 kg / 10,8 lb	10 / 145	15 / 220	1	22	190					
80 / Ø119	3" BSP (ISO 228-G 3)	Brass	5532F-24**	10,2 kg / 22,5 lb	10 / 145	15 / 220	1	22	190					
80 / Ø119	3" BSP (ISO 228-G 3)	Stainless Steel	4300-44**	9,8 kg / 21,6 lb	25 / 363	37,5 / 544	2	22	230					
80 / Ø119	3" BSP (ISO 228-G 3)	Stainless Steel	9300F-44**	8,8 kg / 19,4 lb	25 / 365	37,5 / 544	1	22	190					
-- / Ø119	3" NPT (ANSI B2.1) *	Aluminium	7475F-14**	4,9 kg / 10,8 lb	10 / 145	15 / 220	1	32	199					
-- / Ø119	3" NPT (ANSI B2.1) *	Brass	7475F-24**	10,2 kg / 22,5 lb	10 / 145	15 / 220	1	32	199					
-- / Ø119	3" NPT (ANSI B2.1) *	Stainless Steel	4301-44**	9,8 kg / 21,6 lb	25 / 363	37,5 / 544	2	32	240					
-- / Ø119	3" NPT (ANSI B2.1) *	Stainless Steel	9301F-44**	8,8 kg / 19,4 lb	25 / 363	37,5 / 544	1	32	199					